

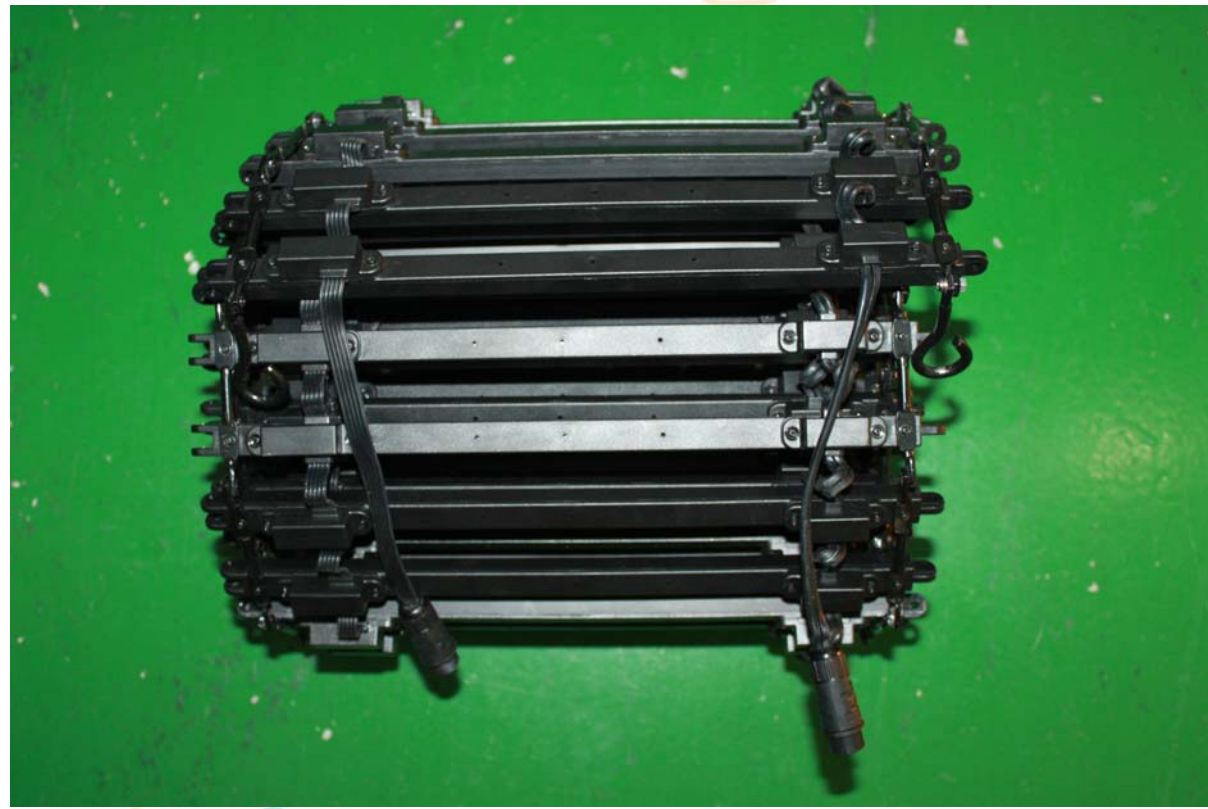



## P37.5 Flexible LED Display Specification

### Flexible Cabinet

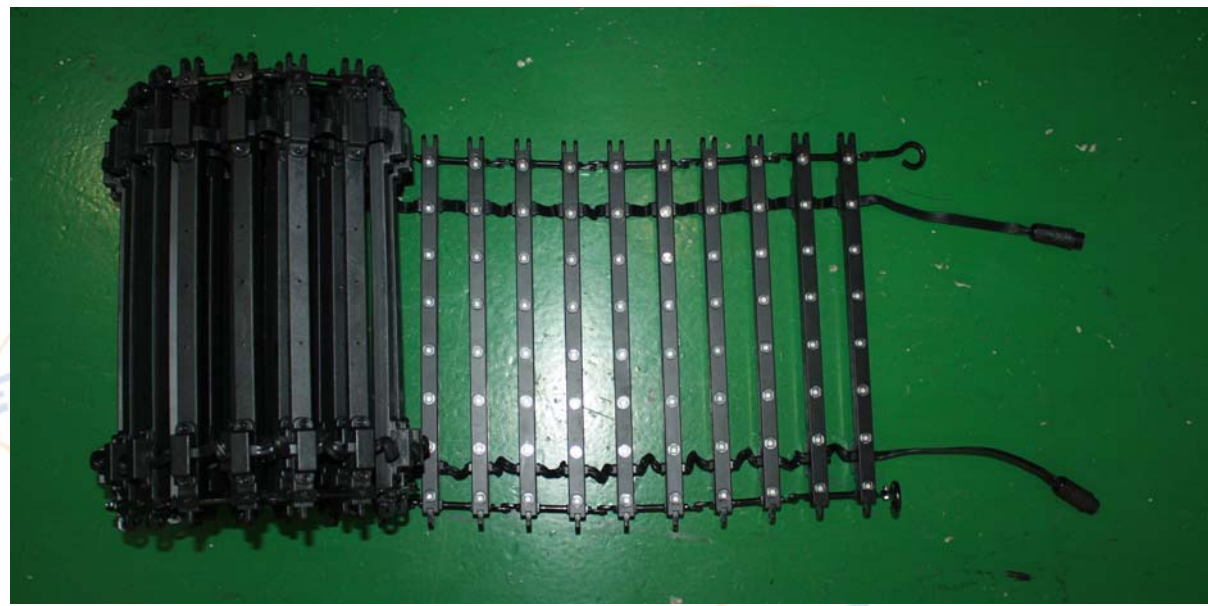


## Display

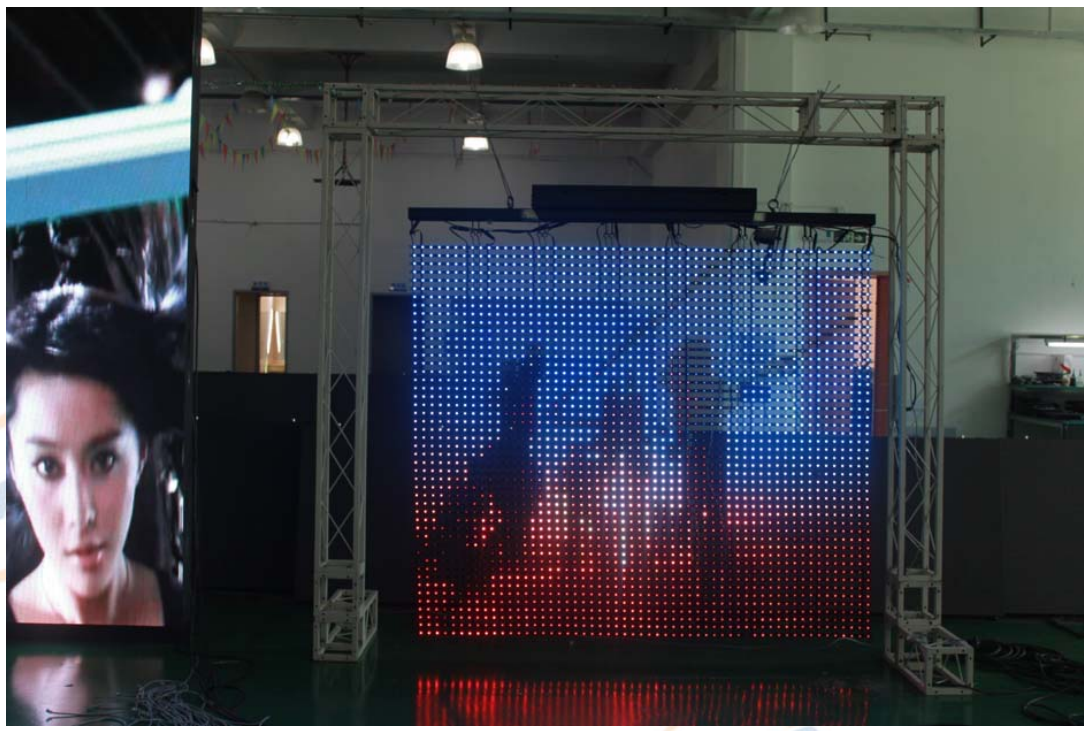

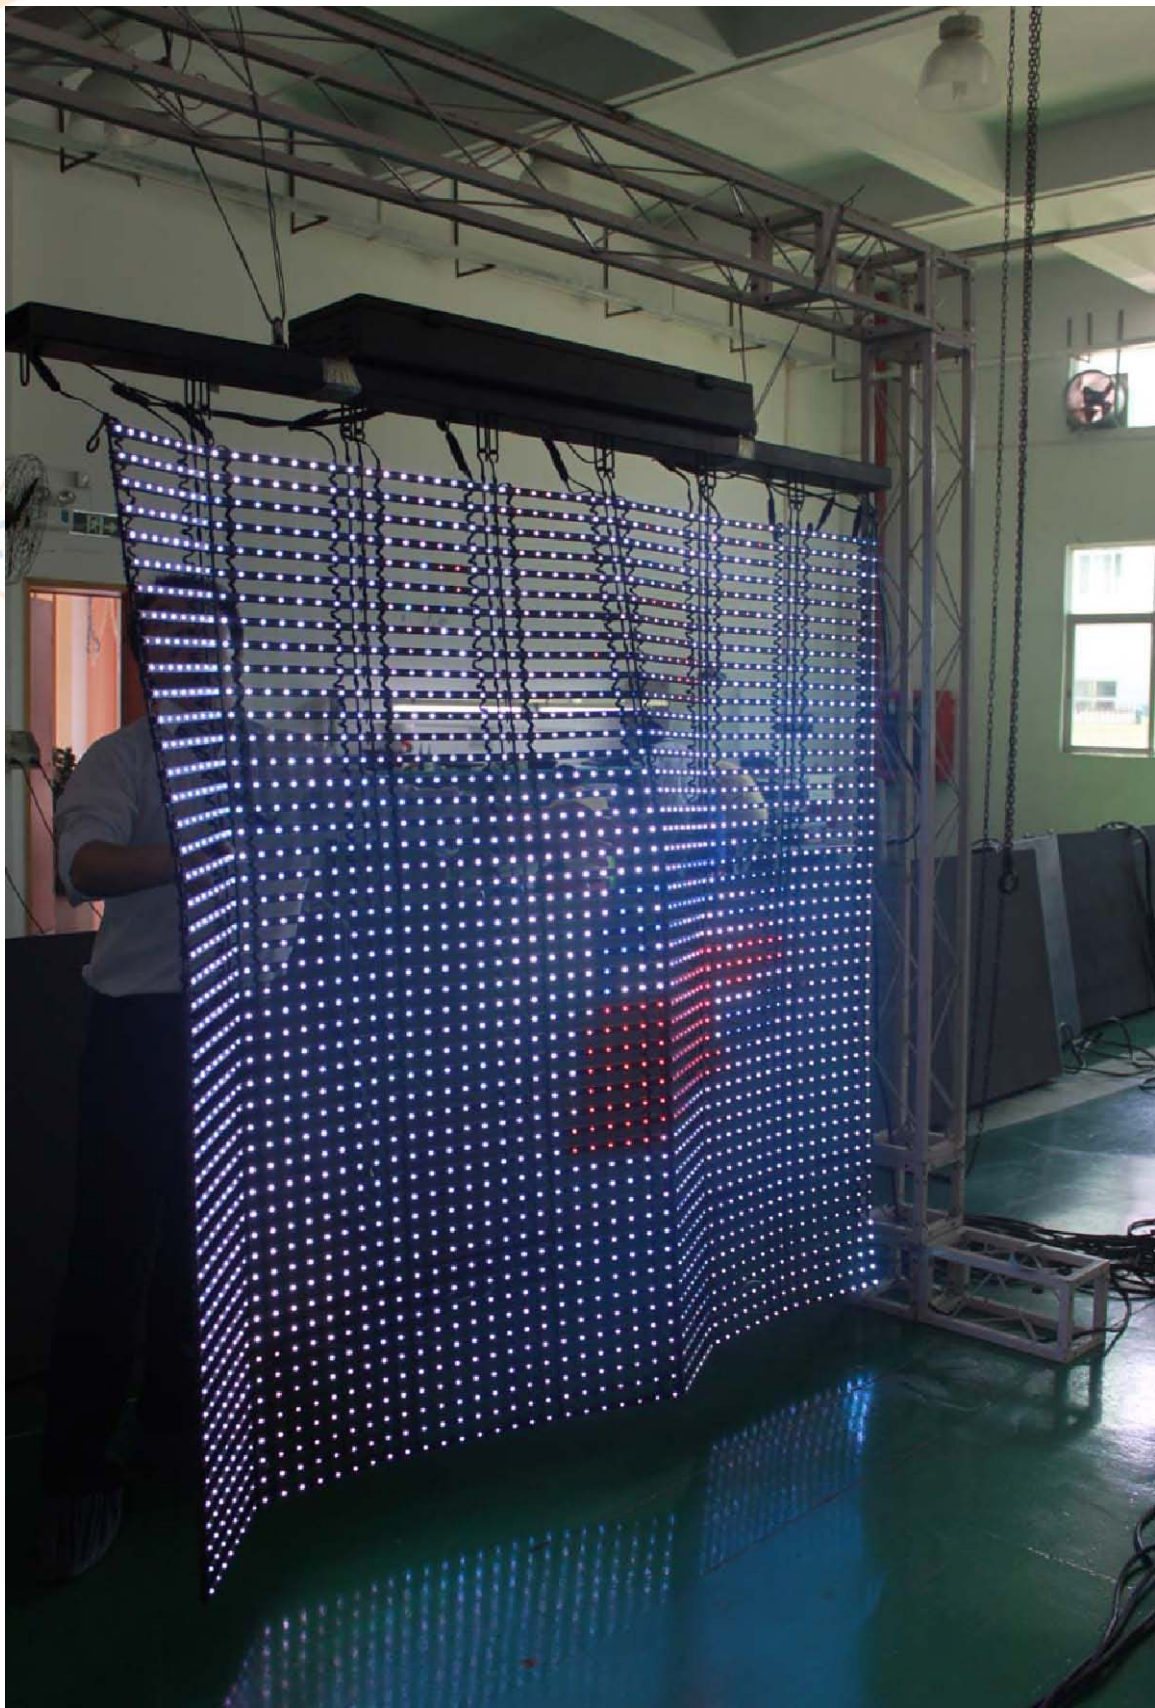



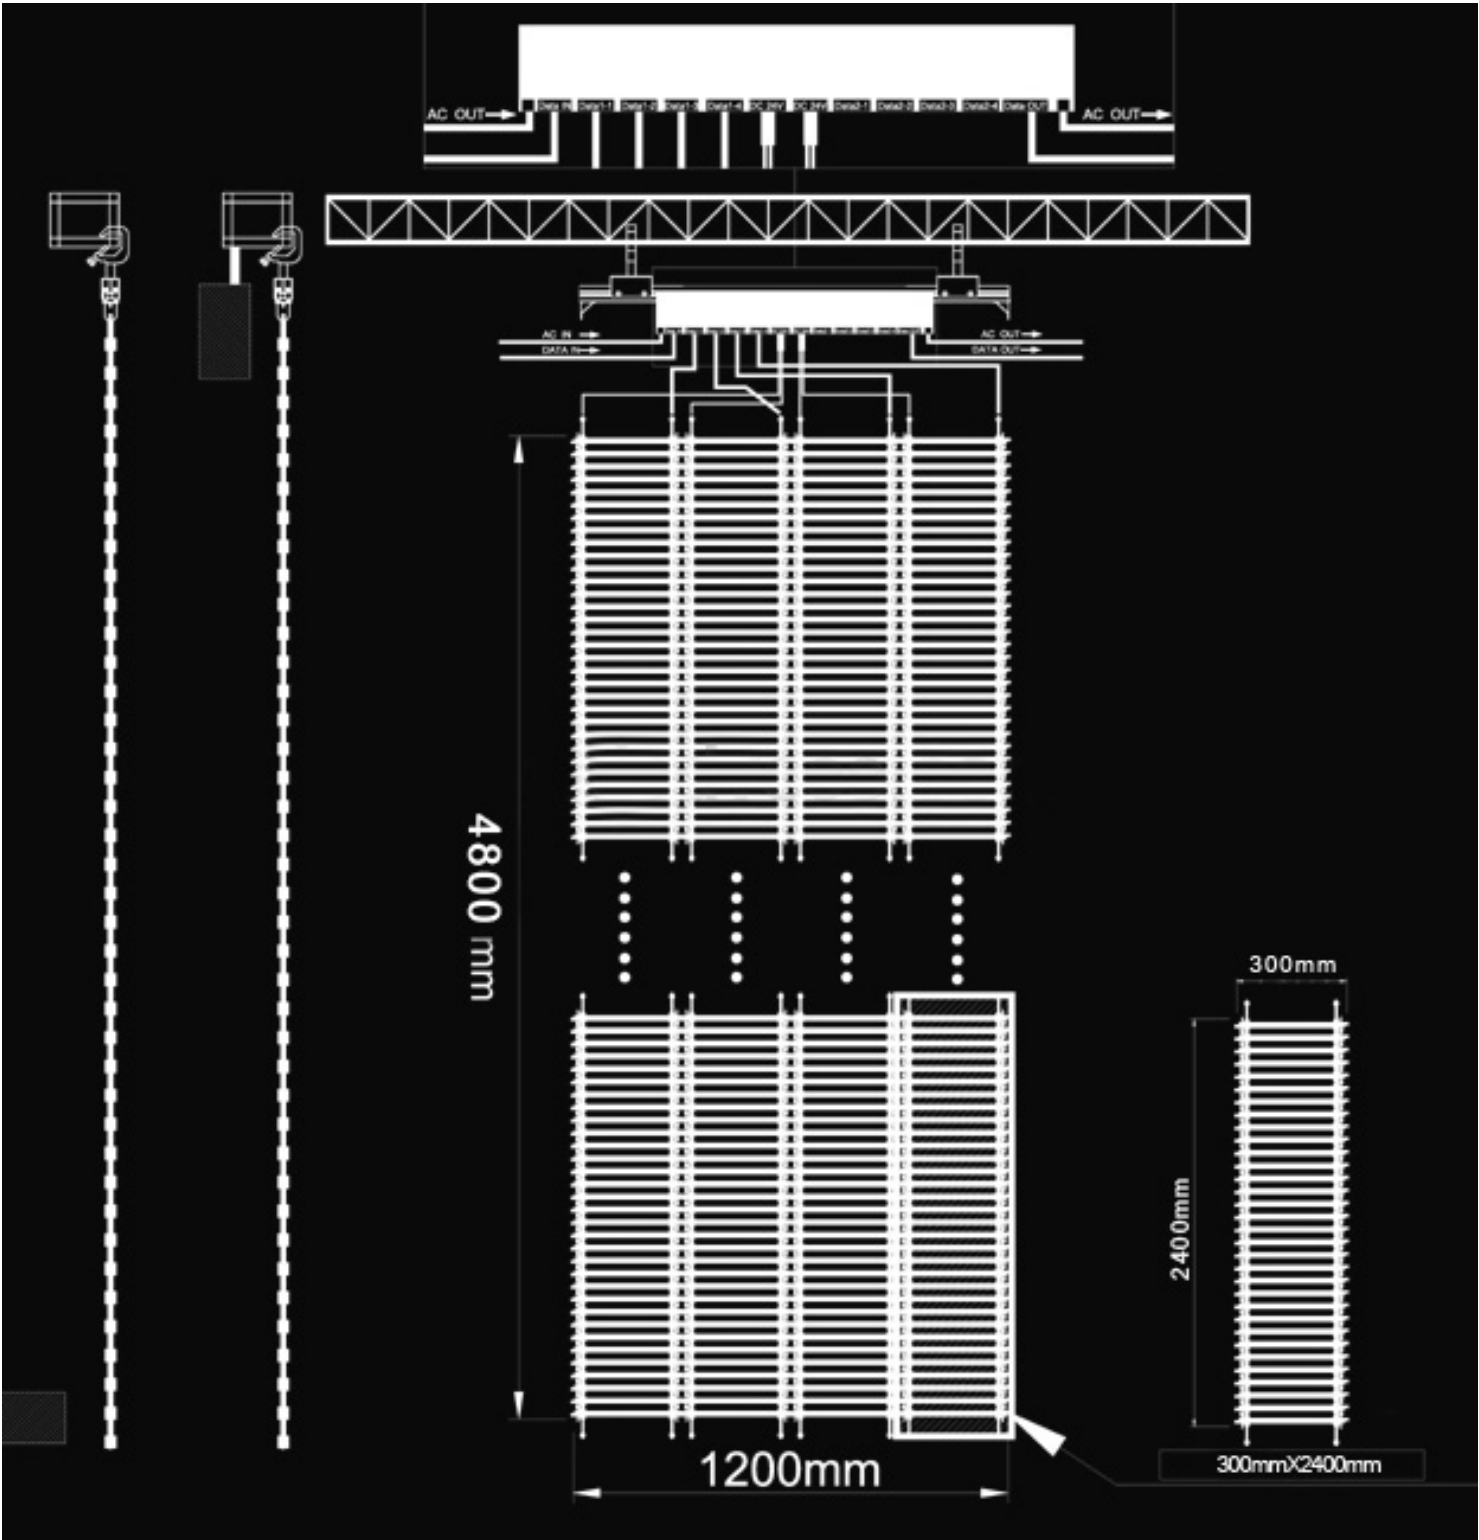



# Shenzhen ERALED Optoelectronics Co., Ltd.




**Application:** (Suitable different application)

1. Flexible as curtain



2. Assemble big size , waterproof, windproof, sun-proof, static-proof, anti-freezing.

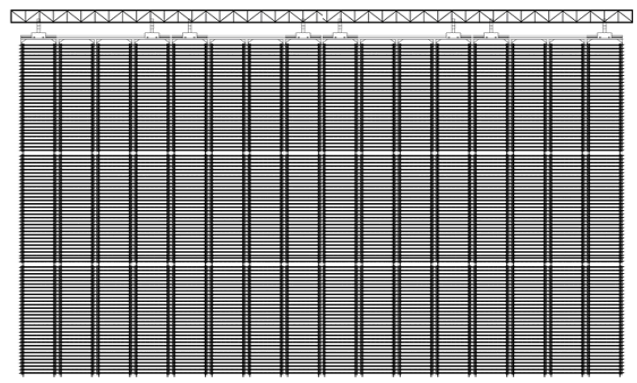

3. Can install as tubbiness screens:







# Shenzhen ERALED Optoelectronics Co., Ltd.



Address: ERALED Industry Park, Xincheng Road, Shajing town, Bao an District, Shenzhen, China  
Email: [manager@eraled.biz](mailto:manager@eraled.biz) MSN: [ERALEDdisplay@hotmail.com](mailto:ERALEDdisplay@hotmail.com), Skype: ERALEDdisplay



## Specifications

Num	Item	Specifications
1	Pixel pitch	37.5mm
2	Density of pixel	711 dots
3	The display size	
4	Sq.m	
5	Color constitution	1R1G1B
6	LED encapsulation	SMD5050
7	Standard strip dimension	12mm*300mm
8	Strip resolution	1*8 dots
9	Standard cabinet size	(H)2400mm*(W)300mm
10	Standard cabinet resolution	32*8dots
11	The best viewing distance	≥50m
12	Viewing angle	H: 160°; V: 120°
13	Max consumption	498W
14	Average consumption	199W
15	Cabinet weight	3.4kg
16	Driving	Static
17	Changing frame frequency	≥60hz/s
18	Refresh frequency	≥240hz
19	Luminance of white balance	900CD/m2
20	Protection grade	IP65
21	Working temperature	-20℃ - +50℃
22	Working voltage	100-240V
23	Grade level	4096
24	Input signal	Video: PAL/NTSC Optioned: VGA, video, DVD,TV
25	Average no failure time	>50 , 000 hours
26	Life-span	>100 , 000 hours
27	Out-of-control point	<0.0001