



Shenzhen ERALED Optoelectronics Co., Ltd.

Photos of Genarators for Mobile LED display screen





Shenzhen ERALED Optoelectronics Co., Ltd.






Shenzhen ERALED Optoelectronics Co., Ltd.






Shenzhen ERALED Optoelectronics Co., Ltd.

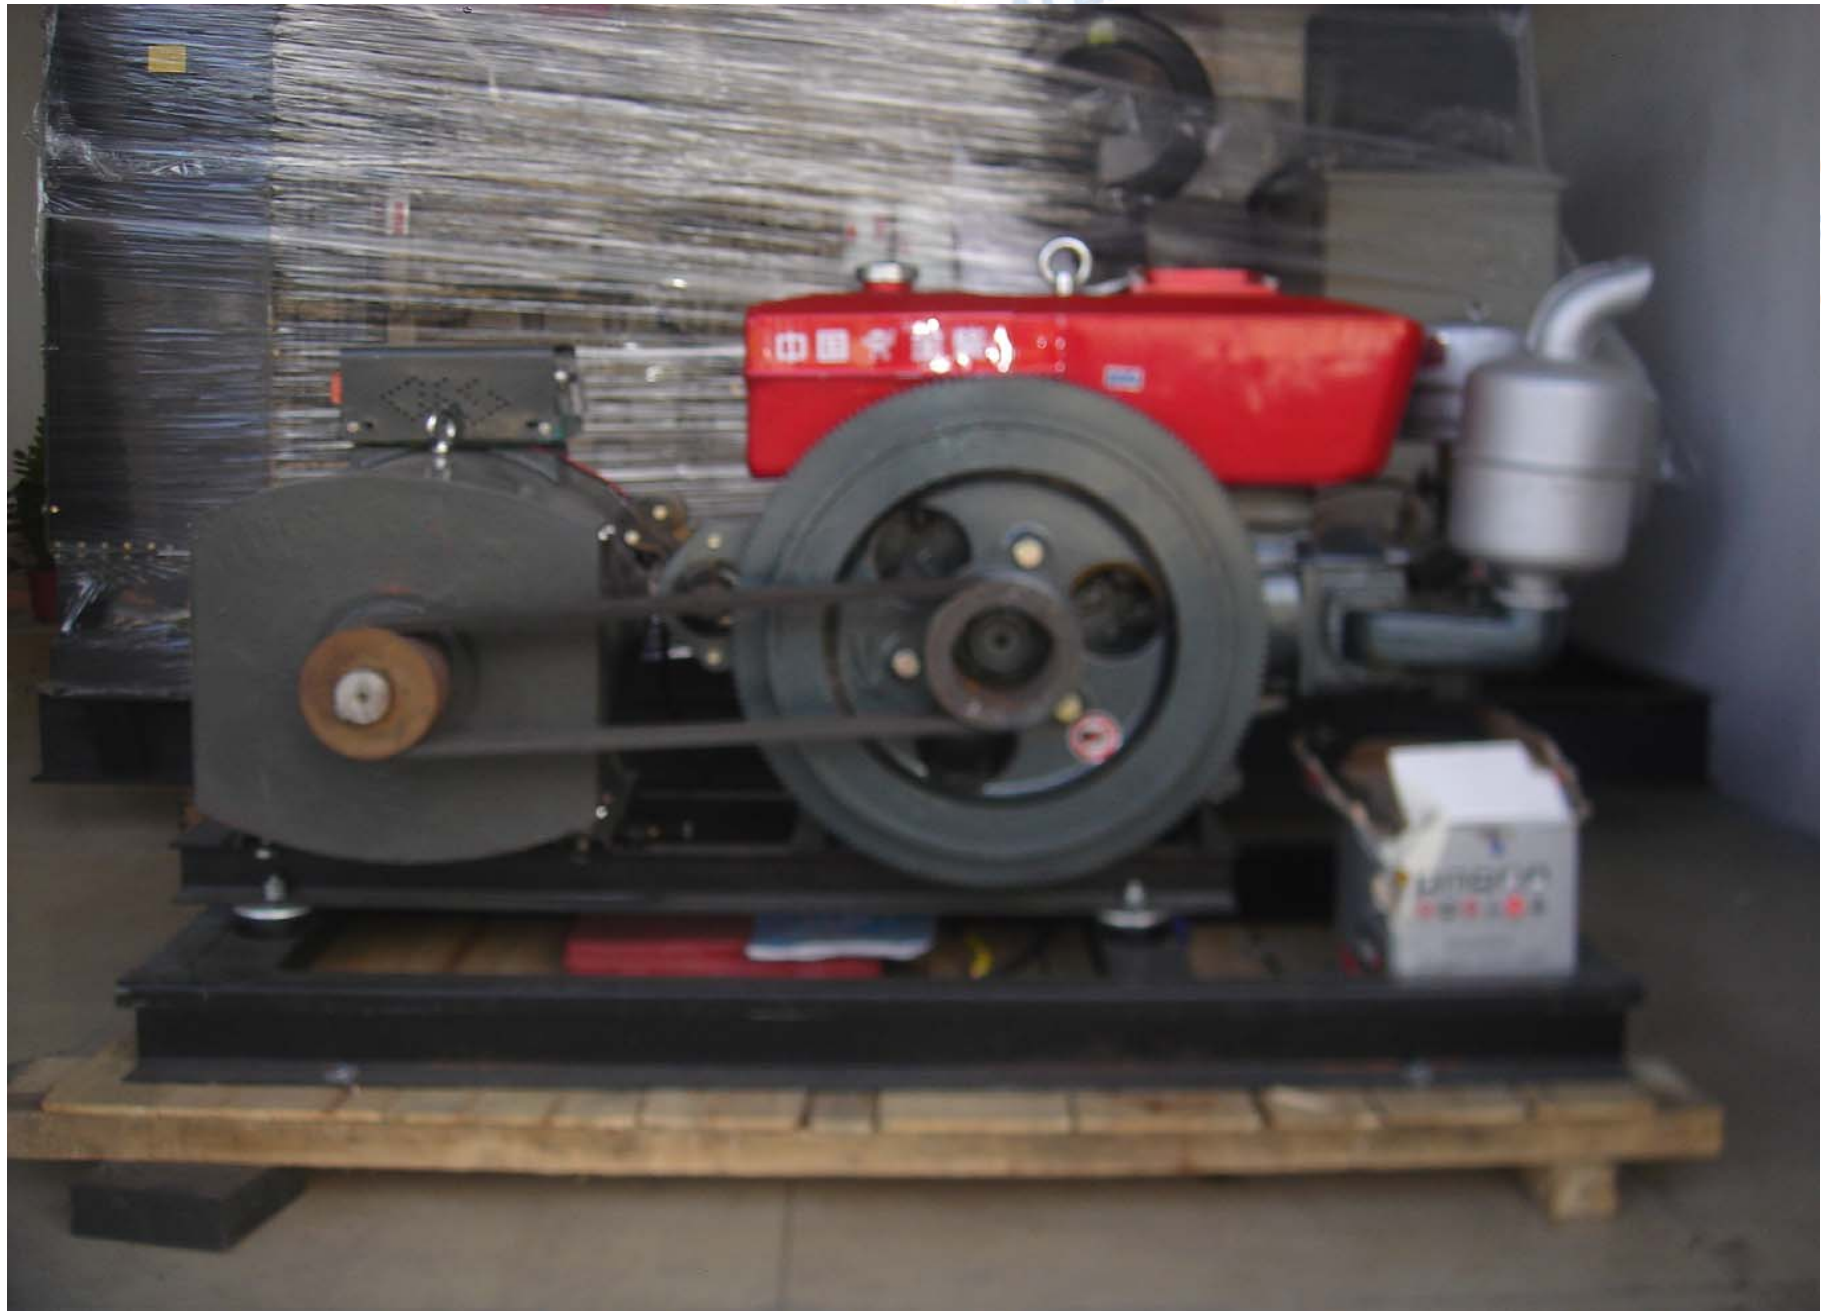



Shenzhen ERALED Optoelectronics Co., Ltd.

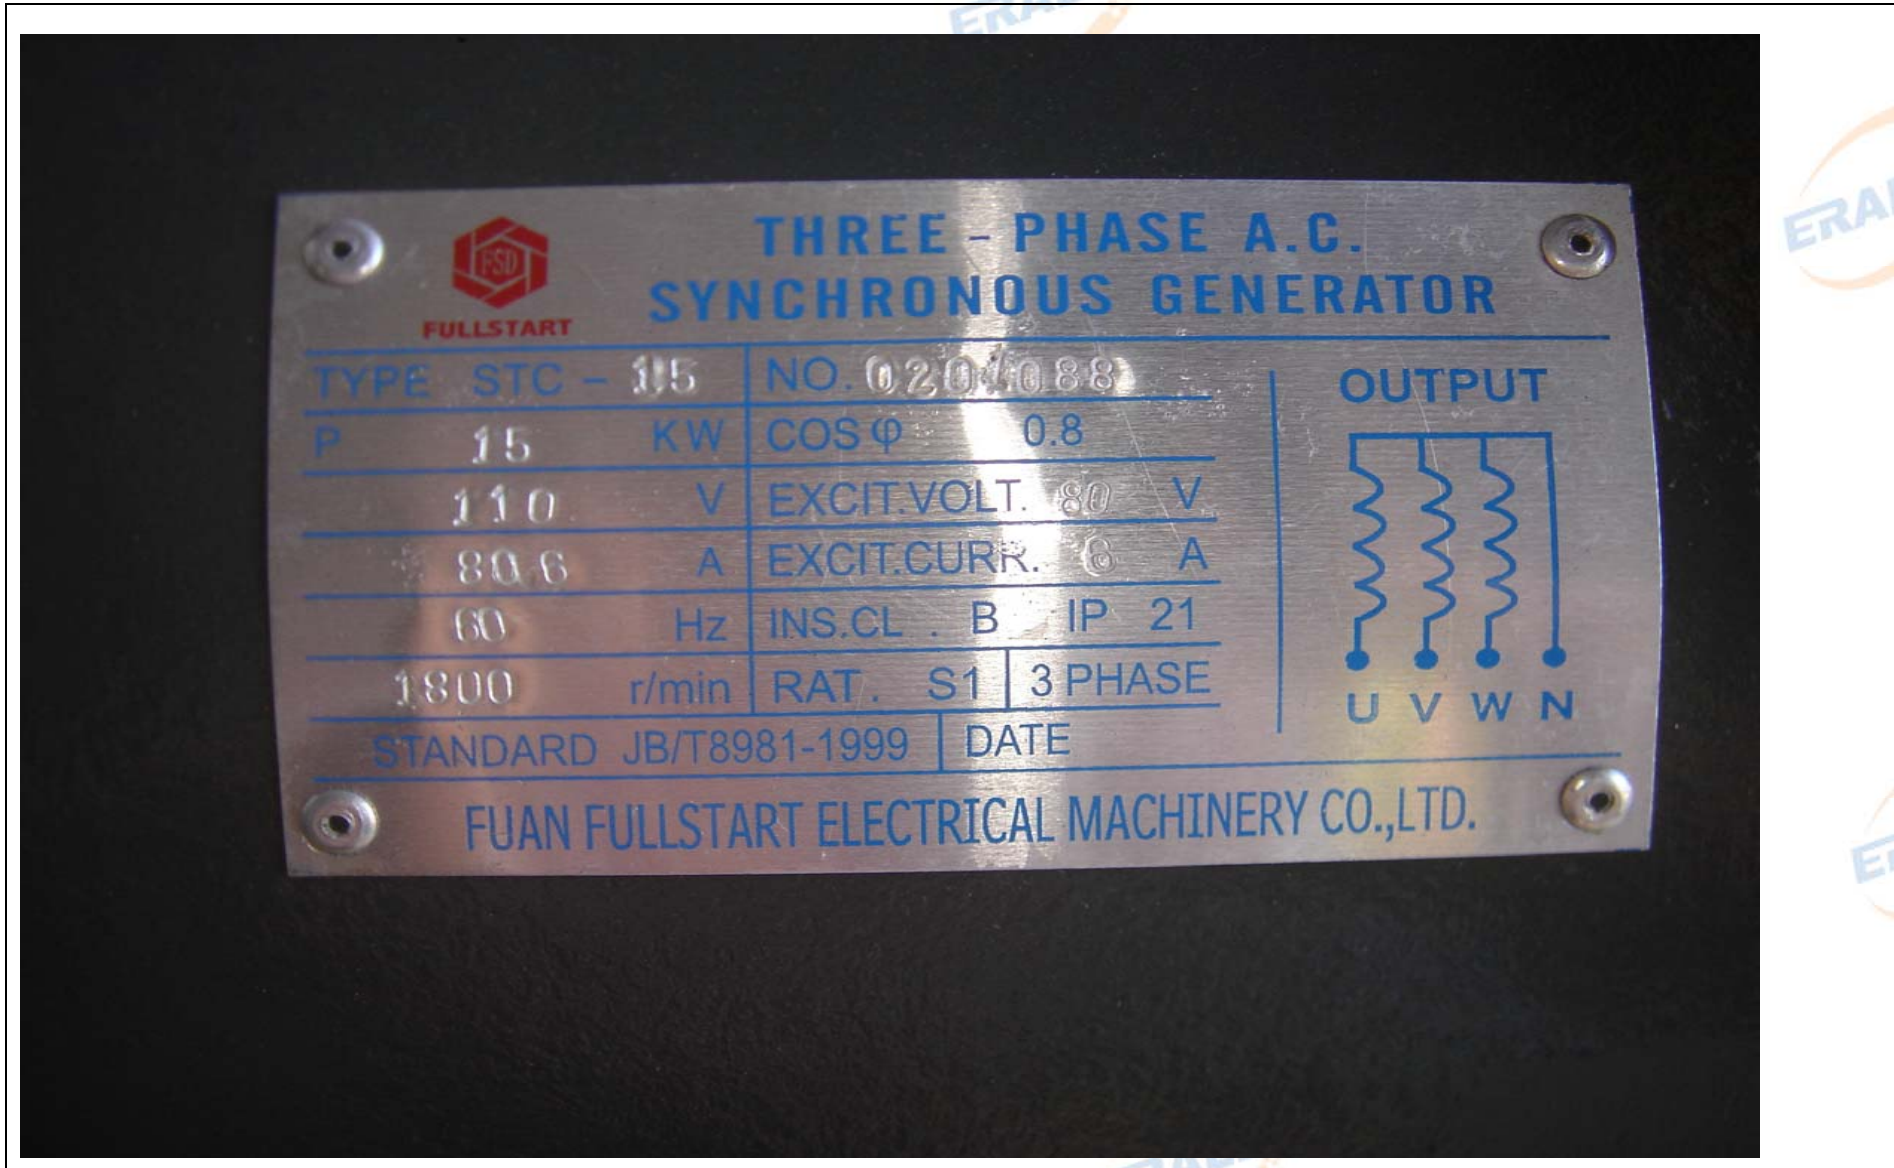


FULLSTART

THREE - PHASE A.C. SYNCHRONOUS GENERATOR

TYPE	STC - 115	NO.	0204088
P	15	KW	COS ϕ 0.8
	110	V	EXCIT. VOLT. 80 V
	80.6	A	EXCIT. CURR. 6 A
	60	Hz	INS. CL. B IP 21
	1800	r/min	RAT. S1 3 PHASE

OUTPUT



STANDARD JB/T8981-1999 | DATE

FUAN FULLSTART ELECTRICAL MACHINERY CO., LTD.



Shenzhen ERALED Optoelectronics Co., Ltd.





Shenzhen ERALED Optoelectronics Co., Ltd.

Technical specification of Generator

Prime output (KW)	10-200
Prime output (KVA)	10-200
Basic parameter	60Hz, 220V/110V, Power Factor 1(Lagging), 1Phase,Electrical start
Type	single cylinder, in line, 4stroke
Combustion System	direct injection
BorexStroke (mm)	115x115
Piston Exhaust Volume (L)	1.195
Compression Ratio	17
Rated Power (KW/HP/RPM)	14.71/20/2200
Max Power (KW/HP/RPM)	16.18/22/2200
Fuel Consumption (g/kw.h)	≤242.1
Oil Consumption (g/kw.h)	≤2.72
Fuel Tank Capacity (L)	15.5
Cooling System	Condenser
Connecting Type	Belt
Starting System	Electric Stator
Net Weight (KG)	≤195
Model	STC-10KW
Rated Output (KW)	10
Rated Output (KVA)	10
Type	Brush, Harmonic excition , Insulation: F , Enclosure: IP21,1800RPM, 4pole, 1phase